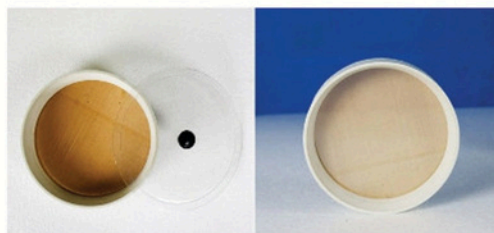


This apparatus is widely used to determine cement fineness. Air flow takes the role as dynamic media. The whole system is under negative pressure, specimen under test will be in flow state under the action of airflow sprayed by the rotating gas nozzle, and travel along with airflow. Fine particles whose size smaller than sieve aperture are extracted away, leaving particles whose size larger than sieve aperture.

**Model FSY-150****Voltage:** AC 220V**Power:** 900W**Feeding:** 25g**Fineness range:** 0.030~1.000mm**Sieve time range:** 0-599sec**Negative pressure:** 4000-6000 Pa**Noise:** 75db**CST Instruments (Thailand) Co., Ltd.**

Tel : 086-086-2000 / 02-915-1693

Tax ID : 0105566170152

95 Rom Klao Road, Khlong Sam Prawet, Lat Krabang, Bangkok 10520