


The apparatus is measure the fluidity of cement (sands) slurry. It fit use for measure the outflow of cement (sands) slurry time less than 14-18 seconds. Cement main use the silicate and ordinary cement.

When user use slag cement please strict to check so that prevent its characteristic don't steady cement grade can't less than No. 425.

New standard use rubber stop instead of value improve the test precision.

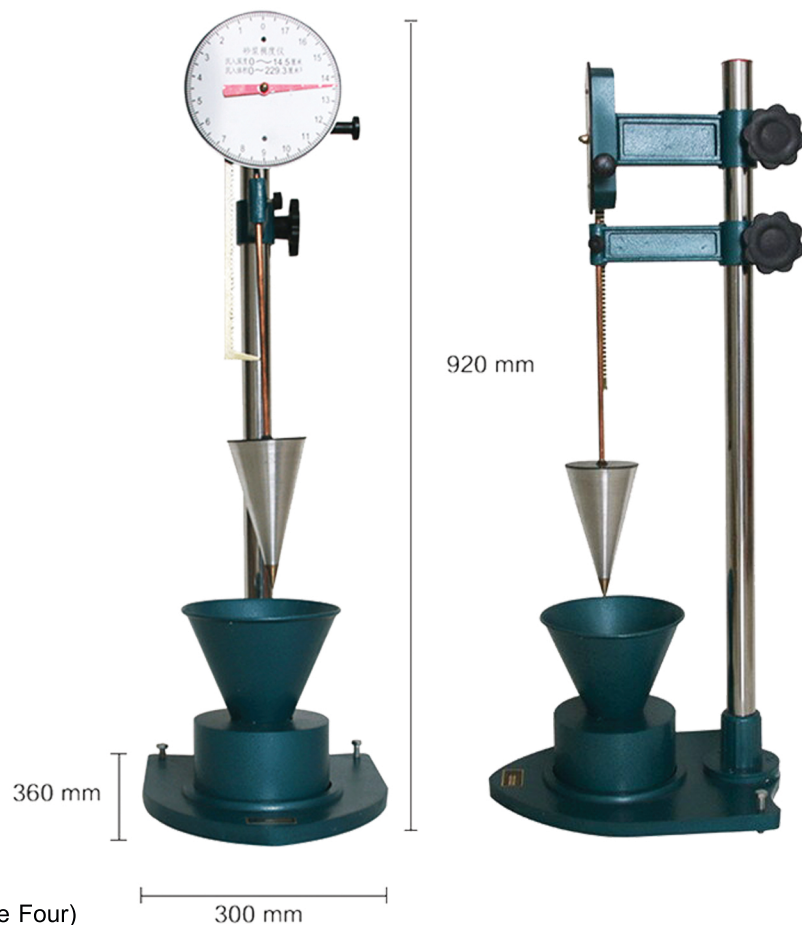

### Specifications

**Flow prick :** as the picture (page Four)

**Accept container :** Min. capacity is 2000ml

**Ring frame or other device :** It's one kind device which can keep the top of container flow  
prick apeak and steady displace

**Level rule :** wood-worker use level rule or similar level rule.

**Stopwatch :** Min. show rubber stopper less than 0.1second

**C S T INSTRUMENTS(THAILAND)LTD.,PART.**

95 Romklao Road, Klongsam-Praves, Ladkrabang, Bangkok 10520

Tel.02-915-1693-5, Mobile.086-086-2000 Email : sales@cst.co.th, www.cst.co.th